


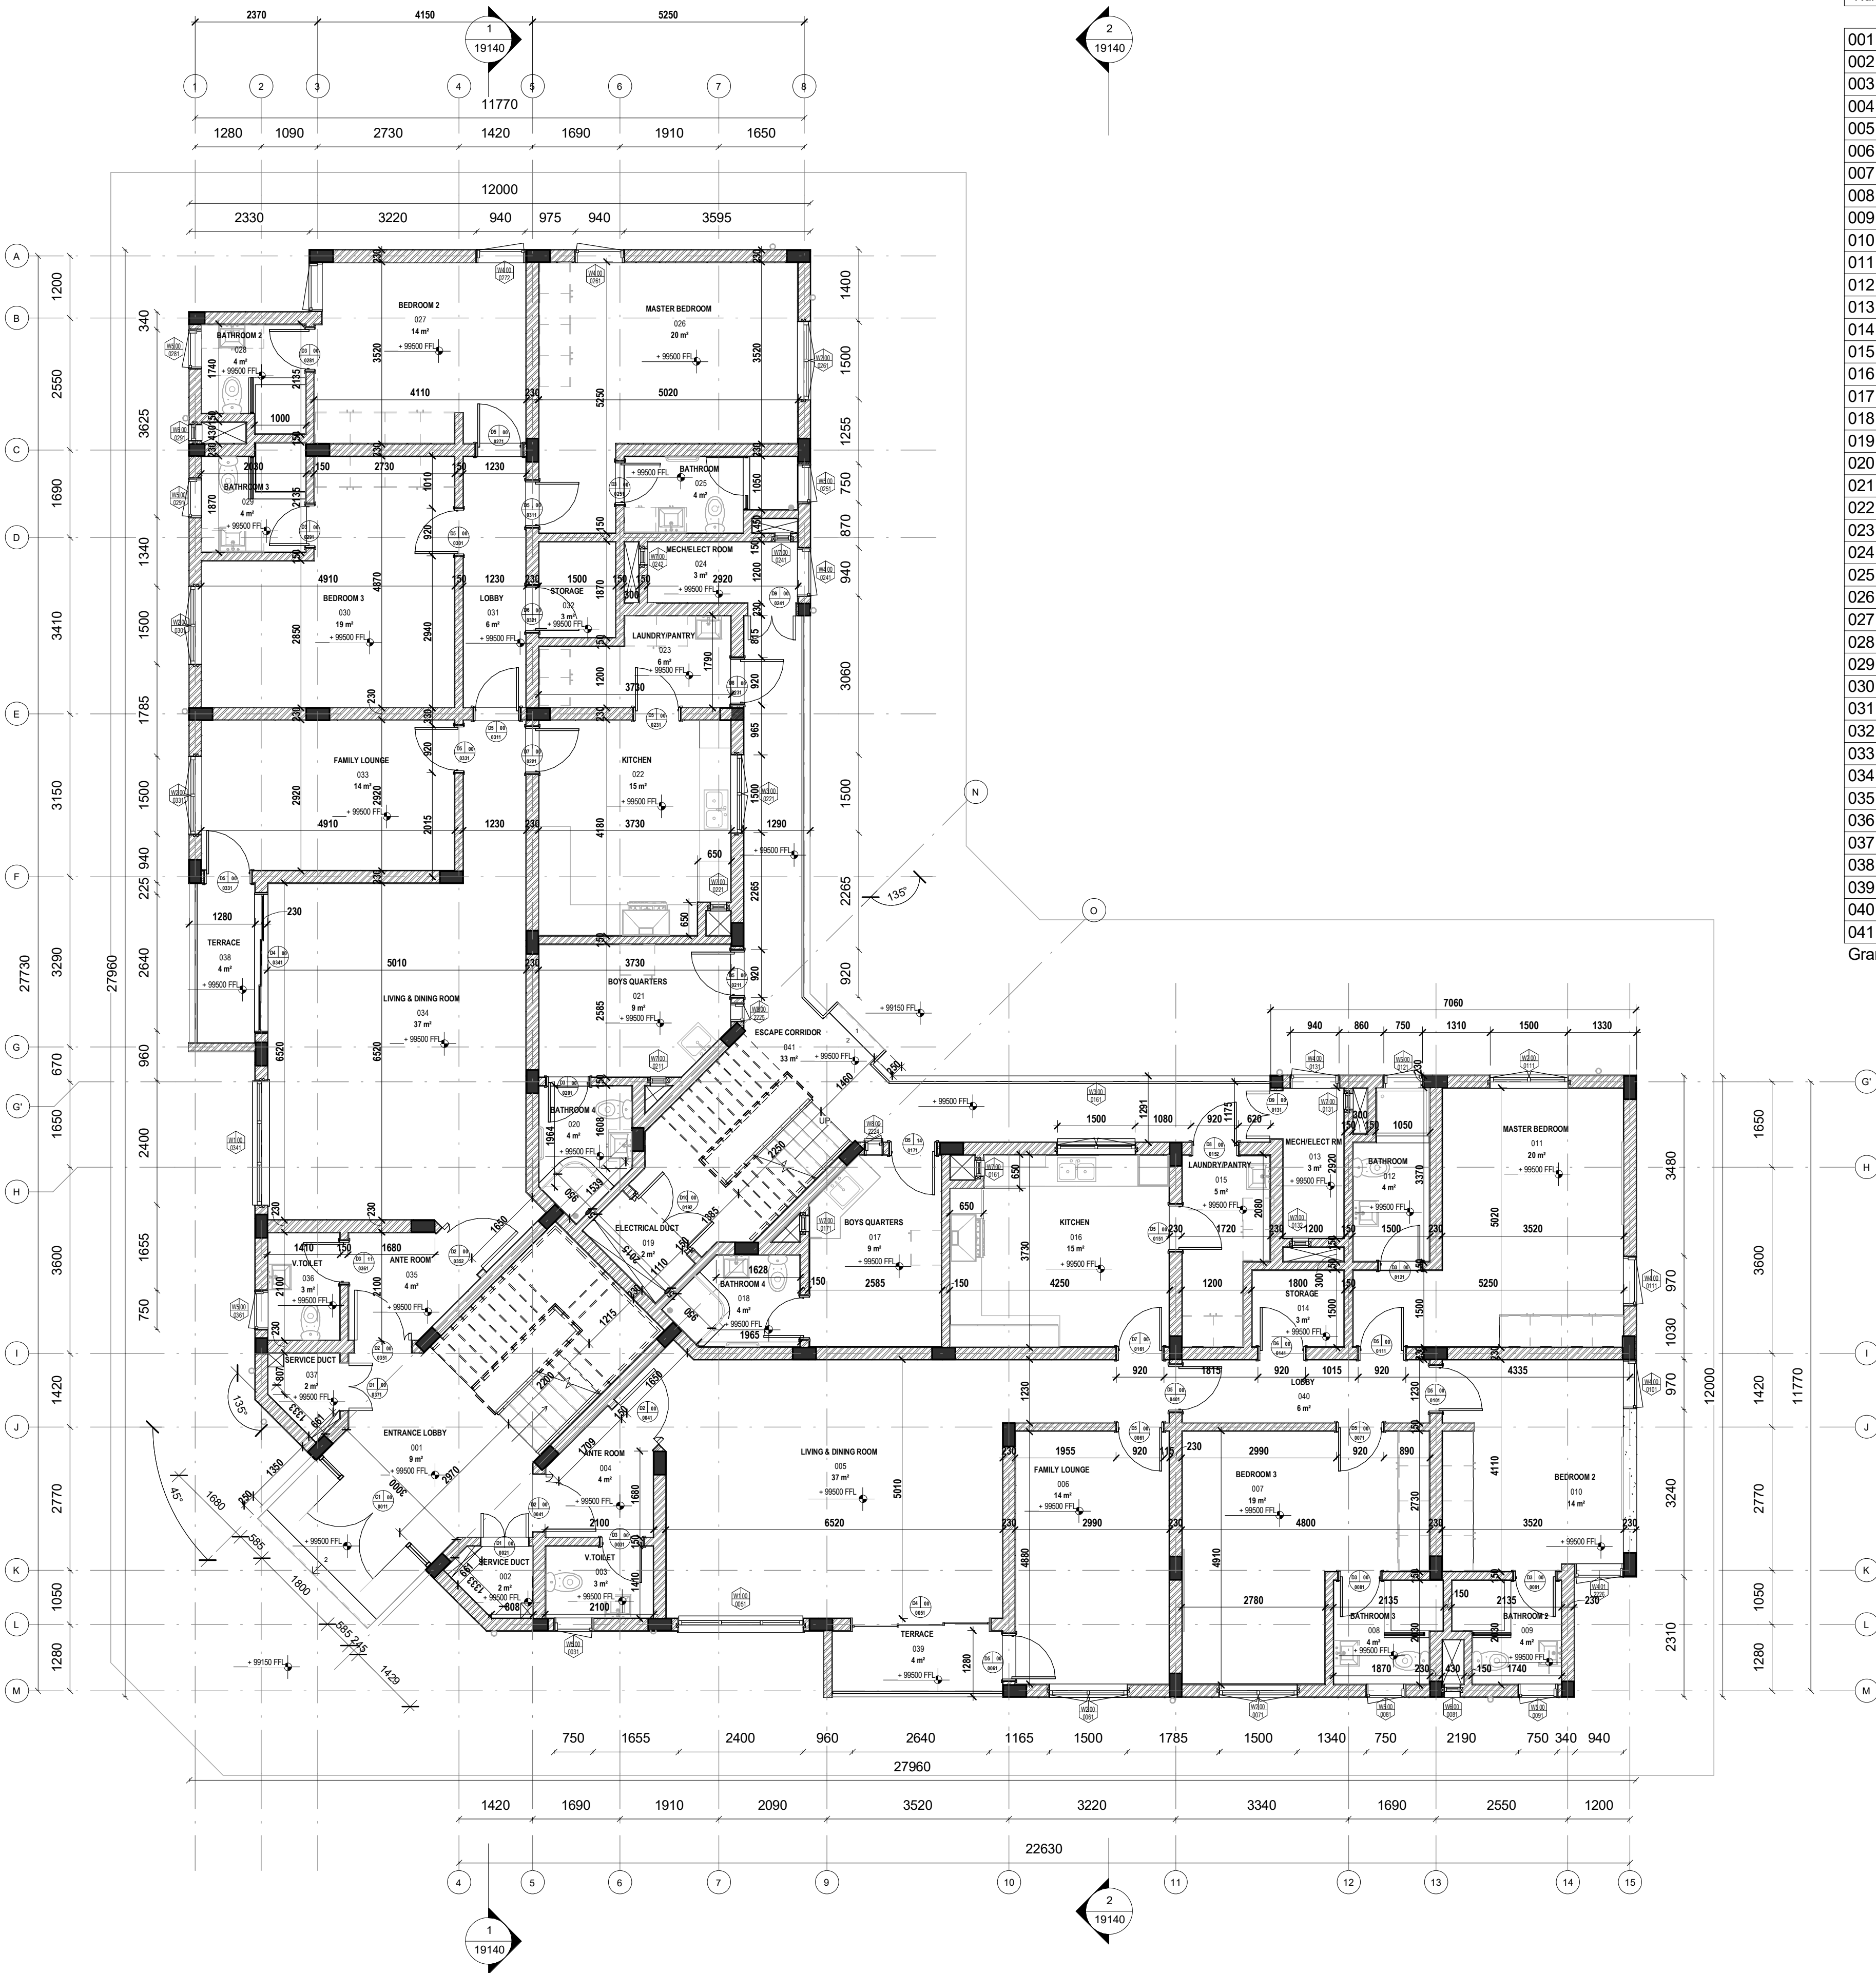

1 GROUND FLOOR PLAN
1 : 75

ROOM SCHEDULE FOR GROUND FLOOR		
Number	Name	Area
001	ENTRANCE LOBBY	9 m ²
002	SERVICE DUCT	2 m ²
003	V. TOILET	3 m ²
004	ANTE ROOM	4 m ²
005	LIVING & DINING ROOM	37 m ²
006	FAMILY LOUNGE	14 m ²
007	BEDROOM 3	19 m ²
008	BATHROOM 3	4 m ²
009	BATHROOM 2	4 m ²
010	BEDROOM 2	14 m ²
011	MASTER BEDROOM	20 m ²
012	BATHROOM	4 m ²
013	MECH/ELECT RM	3 m ²
014	STORAGE	3 m ²
015	LAUNDRY/PANTRY	5 m ²
016	KITCHEN	15 m ²
017	BOYS QUARTERS	9 m ²
018	BATHROOM 4	4 m ²
019	ELECTRICAL DUCT	2 m ²
020	BATHROOM 4	4 m ²
021	BOYS QUARTERS	9 m ²
022	KITCHEN	15 m ²
023	LAUNDRY/PANTRY	6 m ²
024	MECH/ELECT ROOM	3 m ²
025	BATHROOM	4 m ²
026	MASTER BEDROOM	20 m ²
027	BEDROOM 2	14 m ²
028	BATHROOM 2	4 m ²
029	BATHROOM 3	4 m ²
030	BEDROOM 3	19 m ²
031	LOBBY	6 m ²
032	STORAGE	3 m ²
033	FAMILY LOUNGE	14 m ²
034	LIVING & DINING ROOM	37 m ²
035	ANTE ROOM	4 m ²
036	V. TOILET	3 m ²
037	SERVICE DUCT	2 m ²
038	TERRACE	4 m ²
039	TERRACE	4 m ²
040	LOBBY	6 m ²
041	ESCAPE CORRIDOR	33 m ²
Grand total: 41		394 m ²

NOTES

- REFERENCE ELEVATION +9900.00 IS EQUAL TO SITE DATUM +2.6M MEAN SEA LEVEL
- ALL DIMENSIONS ARE IN MILLIMETERS AND ALL COORDINATES ARE IN METERS UNLESS OTHERWISE INDICATED
- ALL COORDINATES SHALL BE CONFIRMED ON SITE
- FOR POSITION OF FIRE EXTINGUISHER REFERS TO DWG. T-14.419.245/246/247
- FOR COLOURS OF FINISH MATERIALS REFER TO DWG. T-14.419.143
- FIRE RATING OF STRUCTURAL ELEMENTS (COLUMNS AND BEAMS) SHALL BE 1 HOUR. INTERIOR EXIT STAIRWAYS ENCLOSURE SHALL HAVE A FIRE RESISTANCE RATING OF NOT LESS THAN 1 HOUR
- FOR POSITION OF SPLIT UNIT UNIT CONDENSER REFER TO DWG. T-14.419.239/240/241
- ALL METALLIC PARTS AND BUILDING REINFORCEMENT OF COLUMNS AND WALLS SHALL BE PROVIDED WITH EARTH PLATE FOR EXTERNAL EARTH CONNECTION AS PER EARTHING AND LIGHTING TYPICAL INSTALLATION DRAWINGS (REF. DOC. T-14.143.101). EARTHING SHALL COMPLY WITH DEP33.64.10.33-GEN
- REFER TO DWG. T-14.419.144 FOR FURNITURE LAYOUT
- DOORS IN FIRE RATED WALL ASSEMBLIES SHALL HAVE THE SAME FIRE RATING AS WALLS : FIRE RATED WALLS SHALL EXTEND FROM THE SLAB TO THE ROOF.


REFERENCE DOCUMENTS

T-14.111.427-SH1 - BUILDING GENERAL SPECIFICATION ASSET PERMANENT HOUSING
T-14.419.138-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - FLOOR PLANS
T-14.419.140-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - SECTIONS
T-14.419.143-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - FINISHING SCHEDULE
T-14.419.144-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - FURNITURE LAYOUT
T-14.419.245-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - GROUND FLOOR FIRE FIGHTING EQUIPMENT LAYOUT
T-14.419.246-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - FIRST FLOOR FIRE FIGHTING EQUIPMENT LAYOUT
T-14.419.247-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - SECOND FLOOR FIRE FIGHTING EQUIPMENT LAYOUT
T-14.419.239-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - GROUND FLOOR HVAC SYSTEM LAYOUT
T-14.419.240-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - FIRST FLOOR HVAC SYSTEM LAYOUT
T-14.419.241-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - SECOND FLOOR HVAC SYSTEM LAYOUT
T-14.162.089-SH1 - PLOT PLAN FOR ASSET PERMANENT HOUSING & OFF SITE -A12-WP7.4-000-GN-MC-300

ABBREVIATION

FFL - FINISHED FLOOR LEVEL
ELECT - ELECTRICAL
CMU - CONCRETE MASONRY UNIT


LEGEND

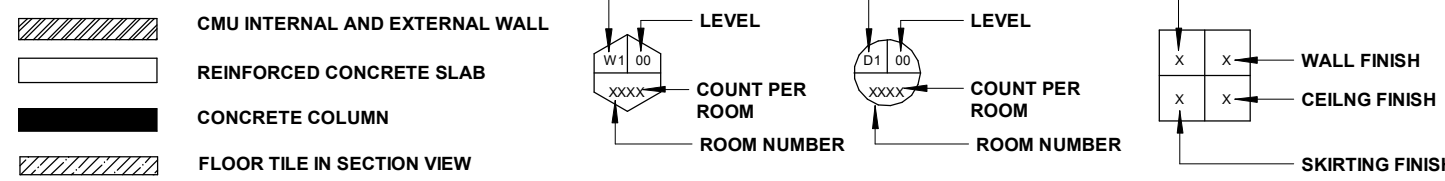

SD-UJV

DOCUMENT STATUS		SIGNED	DATE
1	ACCEPTED AS SUBMITTED (signed certified as final)		
2	REVISED AND RESUBMITTED		
3	REJECTED - Document unacceptable, review and resubmit (work can proceed where not impacted by this rejection)		
4	REVIEW NOT REQUIRED		
SCF - SUPPLIER CERTIFIED AS FINAL			
ISSUE OF CERTIFIED FINAL DOCUMENT DOES NOT RELIEVE SUPPLIER OF RESPONSIBILITY OR LIABILITY UNDER THE CONTRACT/PURCHASE ORDER			

KEY PLAN:

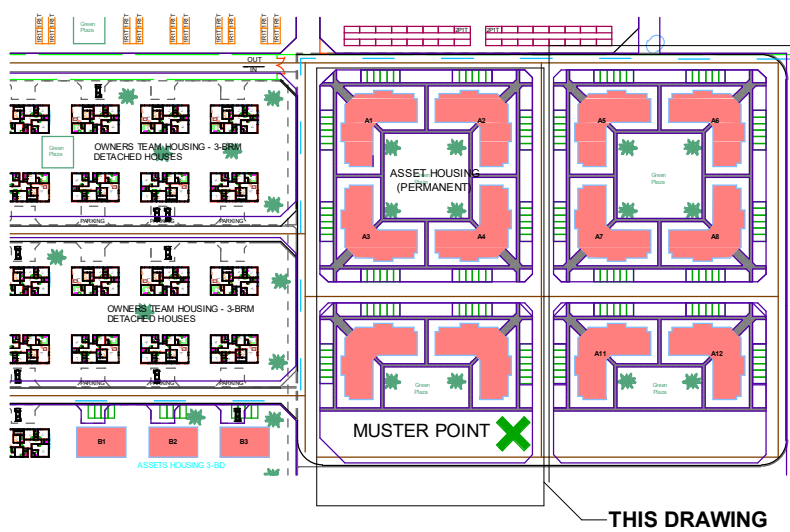

CWP NO: A12-WP7.4-000-BM-BA-102

SCALE 1:75 (METERS)

REV	Revision	Description	DATE	CHKD	DATE	APPD	DATE
AC	CERTIFIED FINAL		20/08/24	YO	20/08/24	EZ	20/08/24
AB	CERTIFIED FINAL		10/10/23	YO	10/10/23	EZ	10/10/23
AA	CERTIFIED FINAL		21/07/23	YO	21/07/23	EZ	21/07/23
A	CERTIFIED FINAL		30/03/23	YO	30/03/23	EZ	30/03/23
OB	REISSUED FOR REVIEW		25/01/23	YO	25/01/23	EZ	25/01/23
OA	REISSUED FOR REVIEW		18/11/22	YO	18/11/22	EZ	18/11/22
O	ISSUED FOR REVIEW		30/08/22	YO	30/08/22	EZ	30/08/22


REVISIONS

This Document is confidential. The copyright there is vested in Nigeria LNG Ltd, Nigeria. Recipient must obtain the written authority of the said company before wholly or partially duplicating. All rights reserved.

PO No: PO 1394524

VENDOR DRAWING NO. NLNG-1394524-ARC-DWG-005				NIGERIA LIQUEFIED NATURAL GAS NLNG - BONNY	
DRAWN : OJ DATE : 30/08/22	PROJECT NLNG TRAIN 7				
CHECKED : YO DATE : 30/08/22					
APPROVED : EZ DATE : 30/08/22	LOCATION BONNY ISLAND, NIGERIA.	DISCIPLINE CIV	UNIT 8500		
APPD LNG : DATE :					

SCALE: As indicated	COMPANY PROJECT NO. 8160170NTP CONTRACTOR PROJECT NO. NB8490	CLIENT DOCUMENT NO. T-14.419.138	SHEET 01 OF 04	REV : AC
------------------------	---	-------------------------------------	-------------------	-------------

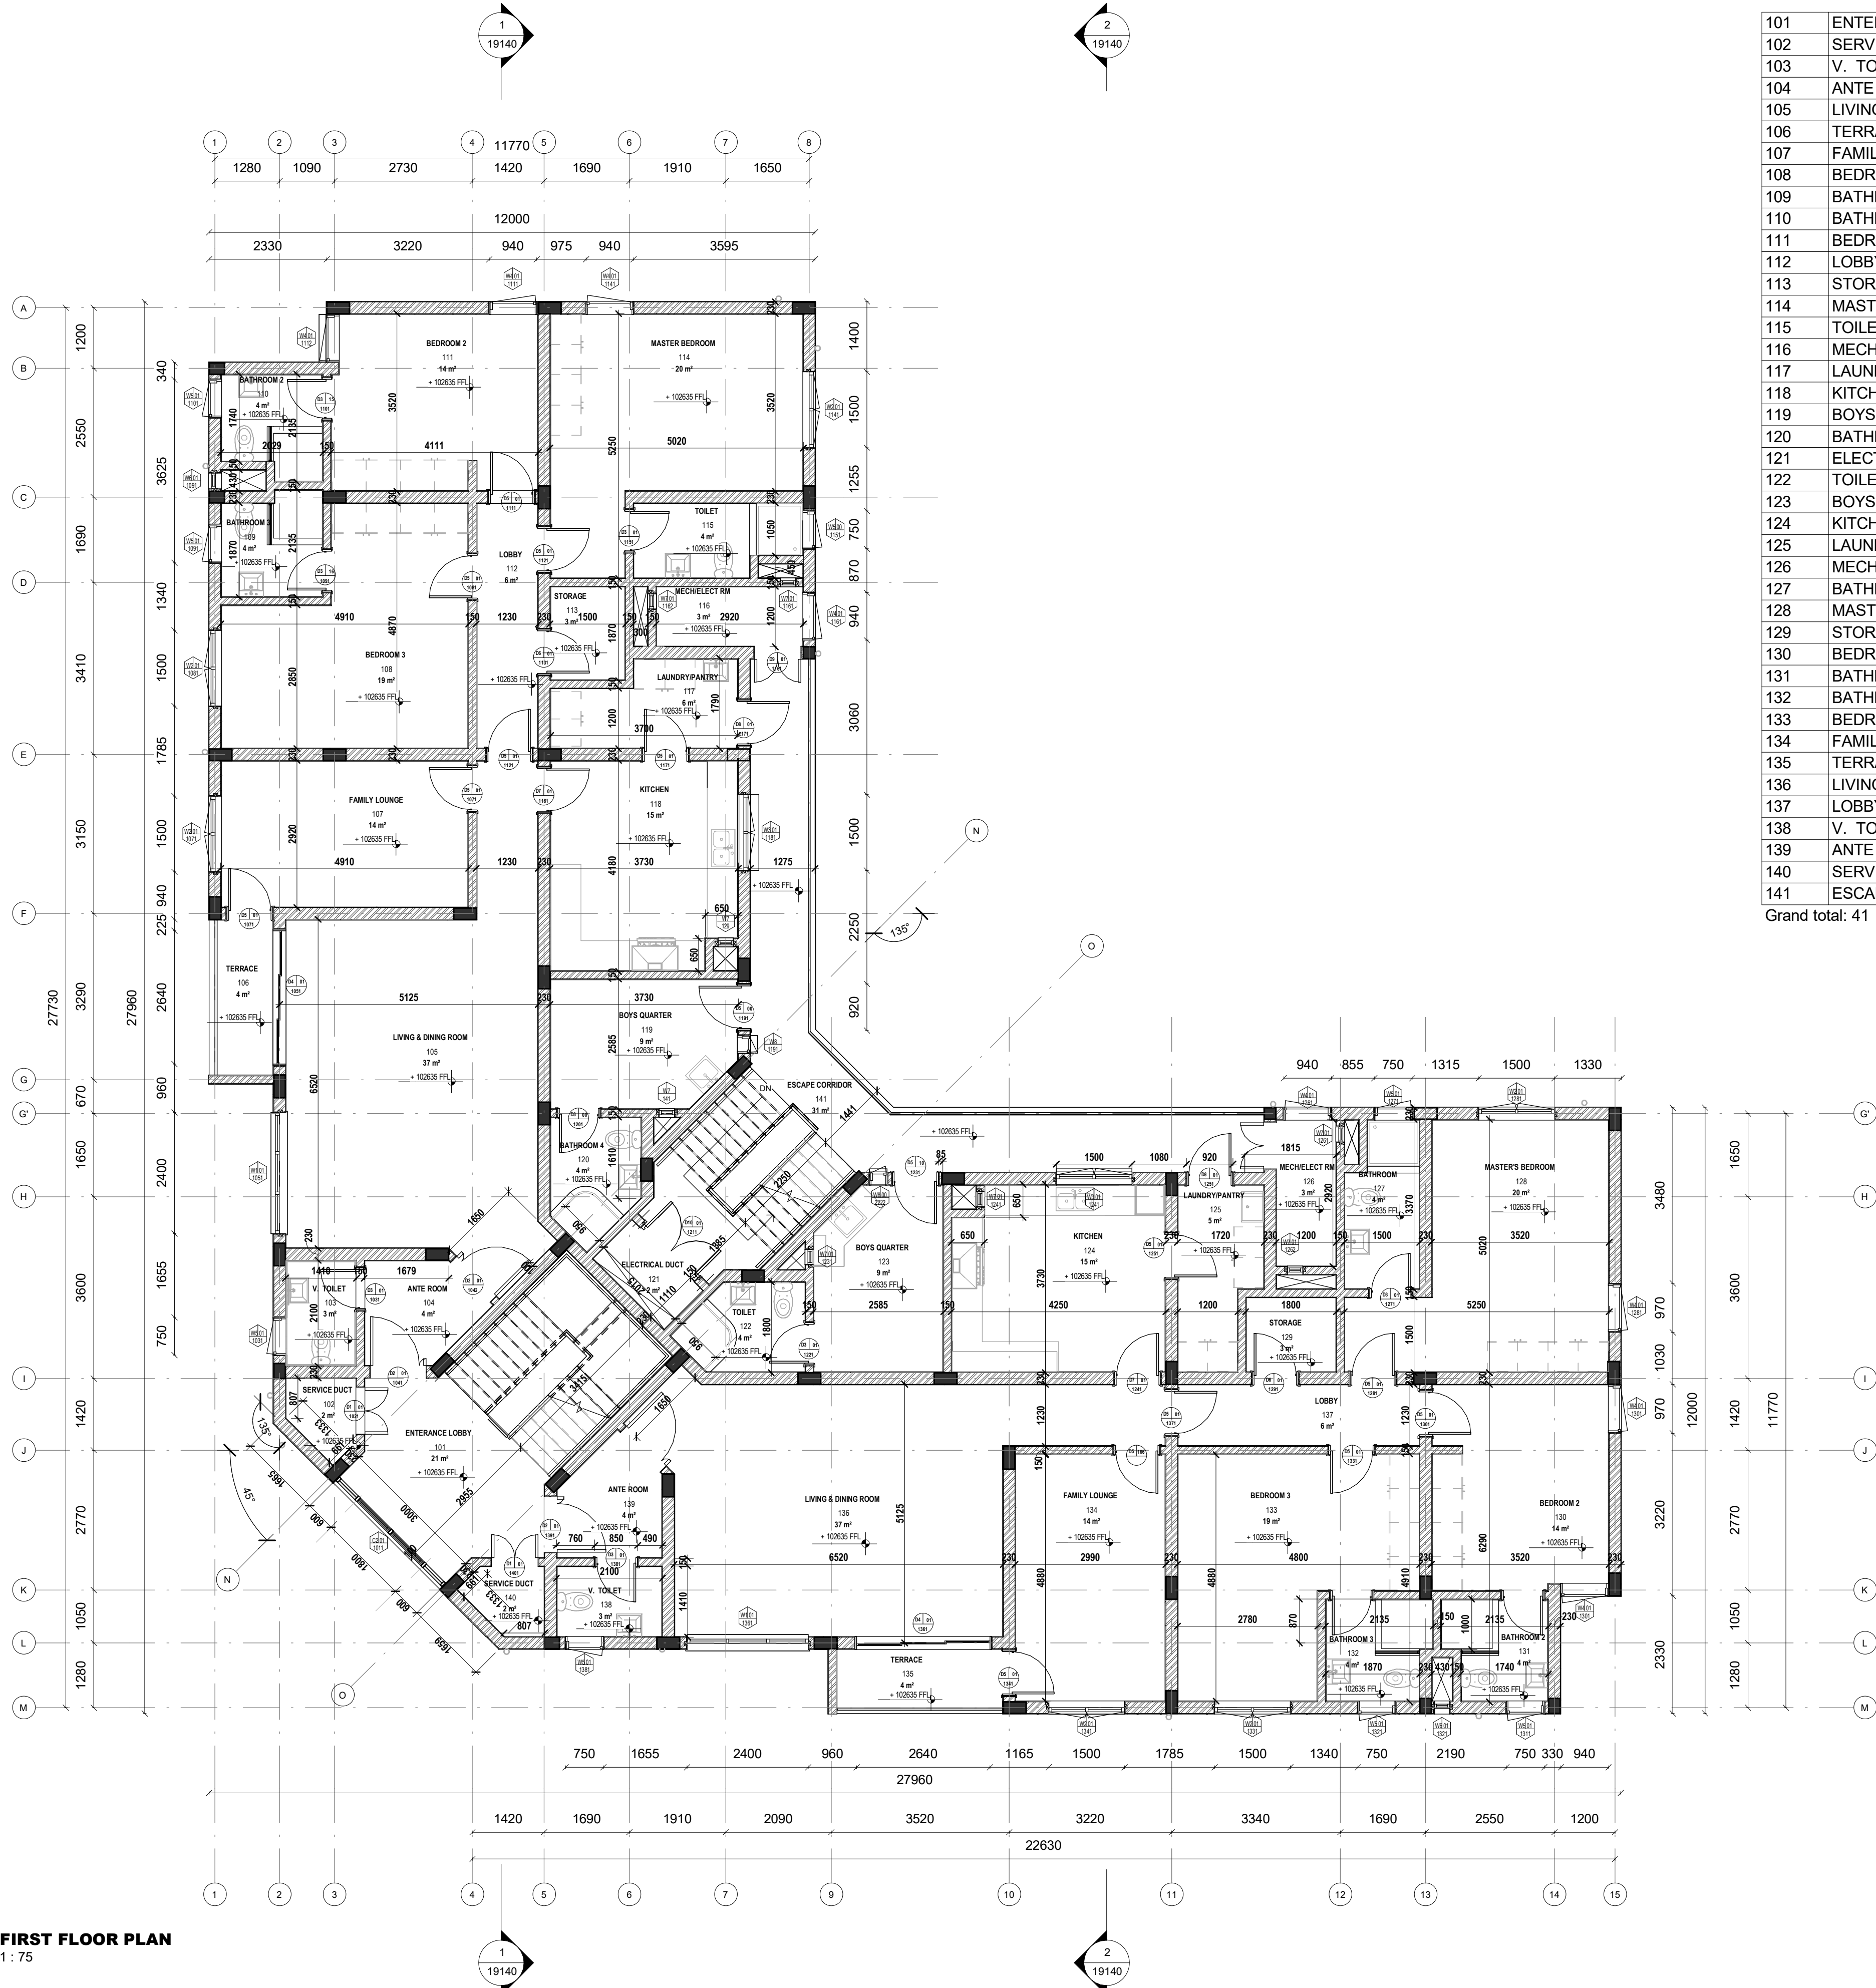

1 FIRST FLOOR PLAN
1: 75

ROOM SCHEDULE FOR FIRST FLOOR		
Number	Name	Area
101	ENTERANCE LOBBY	21 m ²
102	SERVICE DUCT	2 m ²
103	V. TOILET	3 m ²
104	ANTE ROOM	4 m ²
105	LIVING & DINING ROOM	37 m ²
106	TERRACE	4 m ²
107	FAMILY LOUNGE	14 m ²
108	BEDROOM 3	19 m ²
109	BATHROOM 3	4 m ²
110	BATHROOM 2	4 m ²
111	BEDROOM 2	14 m ²
112	LOBBY	6 m ²
113	STORAGE	3 m ²
114	MASTER BEDROOM	20 m ²
115	TOILET	4 m ²
116	MECH/ELECT RM	3 m ²
117	LAUNDRY/PANTRY	6 m ²
118	KITCHEN	15 m ²
119	BOYS QUARTER	9 m ²
120	BATHROOM 4	4 m ²
121	ELECTRICAL DUCT	2 m ²
122	TOILET	4 m ²
123	BOYS QUARTER	9 m ²
124	KITCHEN	15 m ²
125	LAUNDRY/PANTRY	5 m ²
126	MECH/ELECT RM	3 m ²
127	BATHROOM	4 m ²
128	MASTER'S BEDROOM	20 m ²
129	STORAGE	3 m ²
130	BEDROOM 2	14 m ²
131	BATHROOM 2	4 m ²
132	BATHROOM 3	4 m ²
133	BEDROOM 3	19 m ²
134	FAMILY LOUNGE	14 m ²
135	TERRACE	4 m ²
136	LIVING & DINING ROOM	37 m ²
137	LOBBY	6 m ²
138	V. TOILET	3 m ²
139	ANTE ROOM	4 m ²
140	SERVICE DUCT	2 m ²
141	ESCAPE CORRIDOR	31 m ²
Grand total: 41		394 m ²

NOTES

- REFERENCE ELEVATION +99000.00 IS EQUAL TO SITE DATUM +2.6M MEAN SEA LEVEL
- ALL DIMENSIONS ARE IN MILLIMETERS AND ALL COORDINATES ARE IN METERS UNLESS OTHERWISE INDICATED
- ALL COORDINATES SHALL BE CONFIRMED ON SITE
- FOR POSITION OF FIRE EXTINGUISHER REFER TO DWG T-14.419.245/246/247
- FOR COLOURS OF FINISH MATERIALS REFER TO DWG T-14.419.143
- FIRE RATING OF STRUCTURAL ELEMENTS (COLUMNS AND BEAMS SHALL BE 1 HOURS. INTERIOR EXIT STAIRWAYS ENCLOSURE SHALL HAVE A FIRE RESISTANCE RATING OF NOT LESS THAN 1 HOUR
- FOR POSITION OF SPLIT UNIT UNIT CONDENSER REFER TO DWG. T-14.419.238/240/241
- ALL METALLIC PARTS AND BUILDING REINFORCEMENT OF COLUMNS AND WALLS SHALL BE PROVIDED WITH EARTH PLATE FOR EXTERNAL EARTH CONNECTION AS PER EARTHING AND LIGHTING TYPICAL INSTALLATION
- DRAWINGS(REF.DOC.T-14.143.101). EARTHING SHALL COMPLY WITH DEP33.64.10.33-GEN
- REFER TO DWG T-14.419.144 FOR FURNITURE LAYOUT
- DOORS IN FIRE RATED WALL ASSEMBLIES SHALL HAVE THE SAME FIRE RATING AS WALLS : FIRE RATED WALLS SHALL EXTEND FROM THE SLAB TO THE ROOF.


REFERENCE DOCUMENTS

T-14.111.427-SH1 - BUILDING GENERAL SPECIFICATION ASSET PERMANENT HOUSING
T-14.419.138-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - FLOOR PLANS
T-14.419.140-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - SECTIONS
T-14.419.143-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - FINISHING SCHEDULE
T-14.419.144-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - FURNITURE LAYOUT
T-14.419.245-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - GROUND FLOOR FIRE FIGHTING EQUIPMENT LAYOUT
T-14.419.246-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - FIRST FLOOR FIRE FIGHTING EQUIPMENT LAYOUT
T-14.419.247-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - SECOND FLOOR FIRE FIGHTING EQUIPMENT LAYOUT
T-14.419.238-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - GROUND FLOOR HVAC SYSTEM LAYOUT
T-14.419.240-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - FIRST FLOOR HVAC SYSTEM LAYOUT
T-14.419.241-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - SECOND FLOOR HVAC SYSTEM LAYOUT
T-14.162.089-SH1 - PLOT PLAN FOR ASSET PERMANENT HOUSING & OFF SITE -A12-WP7.4-000-GN-MC-300

ABBREVIATION

FFL - FINISHED FLOOR LEVEL
ELECT - ELECTRICAL
CMU - CONCRETE MASONRY UNIT


LEGEND

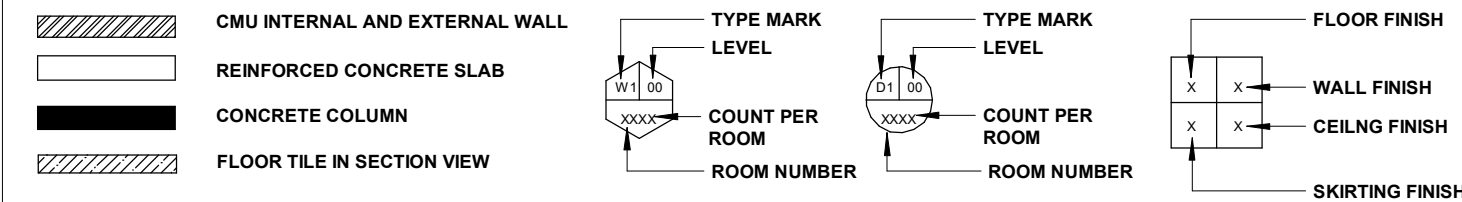

SD-UJV

DOCUMENT STATUS	SIGNED	DATE
1 - ACCEPTED AS SUBMITTED (signed certified as final)		
2 - REVISED AND RESUBMITTED		
3 - REJECTED - DOCUMENT UNACCEPTABLE, REVIEW AND RESUBMIT		
4 - REVIEW NOT REQUIRED		
SCF - SUPPLIER CERTIFIED AS FINAL		
ISSUE OF CERTIFIED FINAL DOCUMENT DOES NOT RELIEVES SUPPLIER OF RESPONSIBILITY OR LIABILITY UNDER THE CONTRACT/PURCHASE ORDER		

KEY PLAN:

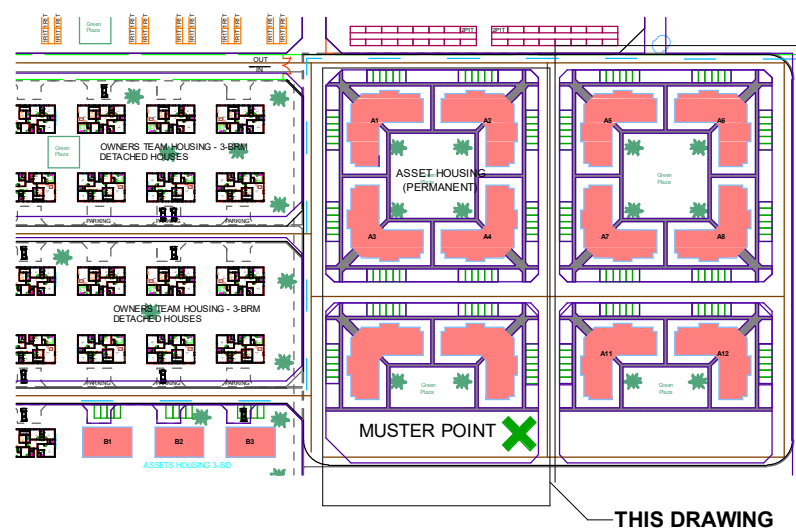

CWP NO: A12-WP7.4-000-BM-BA-102

0 1 2 3 4 5
SCALE 1:75 (METERS)

REV	Revision	Description	DATE	CHKD	DATE	APPD	DATE
AC	CERTIFIED FINAL		20/08/24	YO	20/08/24	EZ	20/08/24
AB	CERTIFIED FINAL		10/10/23	YO	10/10/23	EZ	10/10/23
AA	CERTIFIED FINAL		21/07/23	YO	21/07/23	EZ	21/07/23
A	CERTIFIED FINAL		30/03/23	YO	30/03/23	EZ	30/03/23
OB	REISSUED FOR REVIEW		25/01/23	YO	25/01/23	EZ	25/01/23
OA	REISSUED FOR REVIEW		18/11/22	YO	18/11/22	EZ	18/11/22
O	ISSUED FOR REVIEW		30/08/22	YO	30/08/22	EZ	30/08/22

REVISIONS

This Document is confidential. The copyright there is vested in Nigeria LNG Ltd, Nigeria.
Recipient must obtain the written authority of the said company before wholly or partially duplicating.
All rights reserved.

PO No: PO 1394524

VENDOR DRAWING NO. NLNG-1394524-ARC-DWG-005		NIGERIA LIQUEFIED NATURAL GAS NLNG - BONNY	
DRAWN : OJ DATE : 30/08/22	PROJECT NLNG TRAIN 7	SAPLEM CONTRACTING NIGERIA LTD	DAEWOO E&C NIGERIA LIMITED
CHECKED : YO DATE : 30/08/22	FIRST MARINE AND ENGINEERING SERVICES LTD	CCP Collaborative Partnership	
APPROVED : EZ DATE : 30/08/22	LOCATION BONNY ISLAND, NIGERIA.	DISCIPLINE CIV	UNIT 8500
CONTRACTORS DRAWING NO. L085-CC-B-19138	T I T L E PO 1394524- ASSET PERMANENT HOUSING - TYPE A - FLOOR PLANS		
SCALE: As indicated	COMPANY PROJECT NO. B180170NTP CONTRACTOR PROJECT NO. NB8480	CLIENT DOCUMENT NO. T-14.419.138	SHEET 02 OF 04 REV : AC



NOTES

- REFERENCE ELEVATION +99000.00 IS EQUAL TO SITE DATUM +2.6M MEAN SEA LEVEL
- ALL DIMENSIONS ARE IN MILLIMETERS AND ALL COORDINATES ARE IN METERS UNLESS OTHERWISE INDICATED
- ALL COORDINATES SHALL BE CONFIRMED ON SITE
- FOR POSITION OF FIRE EXTINGUISHER REFER TO DWG. T-14.419.245/246/247
- FOR COLOURS OF FINISH MATERIALS REFER TO DWG. T-14.419.143
- FIRE RATING OF STRUCTURAL ELEMENTS (COLUMNS AND BEAMS SHALL BE 1 HOURS . INTERIOR EXIT STAIRWAYS ENCLOSURE SHALL HAVE A FIRE RESISTANCE RATING OF NOT LESS THAN 1 HOUR
- FOR POSITION OF SPLIT UNIT UNIT CONDENSER REFER TO DWG. T-14.419.238/240/241
- ALL METALLIC PARTS AND BUILDING REINFORCEMENT OF COLUMNS AND WALLS SHALL BE PROVIDED WITH EARTH PLATE FOR EXTERNAL EARTH CONNECTION AS PER EARTHING AND LIGHTING TYPICAL INSTALLATION DRAWINGS(REF.DCC.T-14.143.101). EARTHING SHALL COMPLY WITH DEP33.64.10.33-GEN
- REFER TO DWG.T-14.419.144 FOR FURNITURE LAYOUT
- DOORS IN FIRE RATED WALL ASSEMBLIES SHALL HAVE THE SAME FIRE RATING AS WALLS : FIRE RATED WALLS SHALL EXTEND FROM THE SLAB TO THE ROOF.

REFERENCE DOCUMENTS

T-14.111.427-SH1 - BUILDING GENERAL SPECIFICATION ASSET PERMANENT HOUSING
T-14.419.138-SH1 - PO 1394524 - ASSET PERMANENT HOUSING -TYPE A - FLOOR PLANS
T-14.419.140-SH1 - PO 1394524 - ASSET PERMANENT HOUSING -TYPE A - SECTIONS
T-14.419.143-SH1- PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - FINISHING SCHEDULE
T-14.419.144-SH1- PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - FURNITURE LAYOUT
T-14.419.245-SH1- PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - GROUND FLOOR FIRE FIGHTING EQUIPMENT LAYOUT
T-14.419.246-SH1- PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - FIRST FLOOR FIRE FIGHTING EQUIPMENT LAYOUT
T-14.419.247-SH1- PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - SECOND FLOOR FIRE FIGHTING EQUIPMENT LAYOUT
T-14.419.238-SH1- PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - GROUND FLOOR HVAC SYSTEM LAYOUT
T-14.419.240-SH1- PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - FIRST FLOOR HVAC SYSTEM LAYOUT
T-14.419.241-SH1- PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - SECOND FLOOR HVAC SYSTEM LAYOUT
T-14.162.089-SH1 - PLOT PLAN FOR ASSET PERMANENT HOUSING & OFF SITE -A12-WP7.4-000-GN-MC-300

ABBREVIATION

FFL - FINISHED FLOOR LEVEL
ELECT - ELECTRICAL
CMU - CONCRETE MASONRY UNIT

LEGEND

CMU INTERNAL AND EXTERNAL WALL
REINFORCED CONCRETE SLAB
CONCRETE COLUMN
FLOOR TILE IN SECTION VIEW

TYPE MARK LEVEL
COUNT PER ROOM
ROOM NUMBER

TYPE MARK LEVEL
COUNT PER ROOM
ROOM NUMBER

FLOOR FINISH
WALL FINISH
CEILING FINISH
SKIRTING FINISH

SD-UJV

DOCUMENT STATUS	SIGNED	DATE
1 - ACCEPTED AS SUBMITTED (subject certified as final)		
2 - REVISE AND RESUBMIT INCORPORATE COMMENTS, UP-REV AND RESUBMIT		
3 - REJECTED - Document unacceptable, revise and resubmit (work can proceed where not impacted by this rejection)		
4 - REVIEW NOT REQUIRED		
SCF - SUPPLIER CERTIFIED AS FINAL		
ISSUE OF CERTIFIED FINAL DOCUMENT DOES NOT RELIEVES SUPPLIER OF RESPONSIBILITY OR LIABILITY UNDER THE CONTRACT/PURCHASE ORDER		

KEY PLAN:

CWP NO: A12-WP7.4-000-BM-BA-102

SCALE 1:75 (METERS)

REV	Revision	Description	DATE	CHKO	DATE	APPD	DATE
AC	CERTIFIED FINAL		20/08/24	YO	20/08/24	EZ	20/08/24
AB	CERTIFIED FINAL		10/10/23	YO	10/10/23	EZ	10/10/23
AA	CERTIFIED FINAL		21/07/23	YO	21/07/23	EZ	21/07/23
A	CERTIFIED FINAL		30/03/23	YO	30/03/23	EZ	30/03/23
OB	REISSUED FOR REVIEW		25/01/23	YO	25/01/23	EZ	25/01/23
OA	REISSUED FOR REVIEW		18/11/22	YO	18/11/22	EZ	18/11/22
O	ISSUED FOR REVIEW		30/08/22	YO	30/08/22	EZ	30/08/22

REVISIONS

This Document is confidential. The copyright there is vested in Nigeria LNG Ltd, Nigeria.
Recipient must obtain the written authority of the said company before wholly or partially duplicating.
All rights reserved.

PO No: PO 1394524

VENDOR DRAWING NO.
NLNG-1394524-ARC-DWG-005

DRAWN : OJ
DATE : 30/08/22

CHECKED : YO
DATE : 30/08/22

APPROVED : EZ
DATE : 30/08/22

APPD LNG :
DATE :

CONTRACTORS DRAWING NO.
L085-CC-B-19138

SCALE:
As indicated

PROJECT
NLNG TRAIN 7

SAPLEM CONTRACTING NIGERIA LTD

DAEWOO E&C NIGERIA LIMITED

FIRST MARINE AND MARINE ENGINEERING SERVICES LTD

CONSULTANTS
CCP Collaborative Partnership

LOCATION
BONNY ISLAND, NIGERIA.

DISCIPLINE
CIV

UNIT
8500


TITLE
PO 1394524- ASSET PERMANENT HOUSING - TYPE A - FLOOR PLANS

COMPANY PROJECT NO.
B180170NTP

CLIENT DOCUMENT NO.
T-14.419.138

SHEET
03 OF 04

REV :
AC

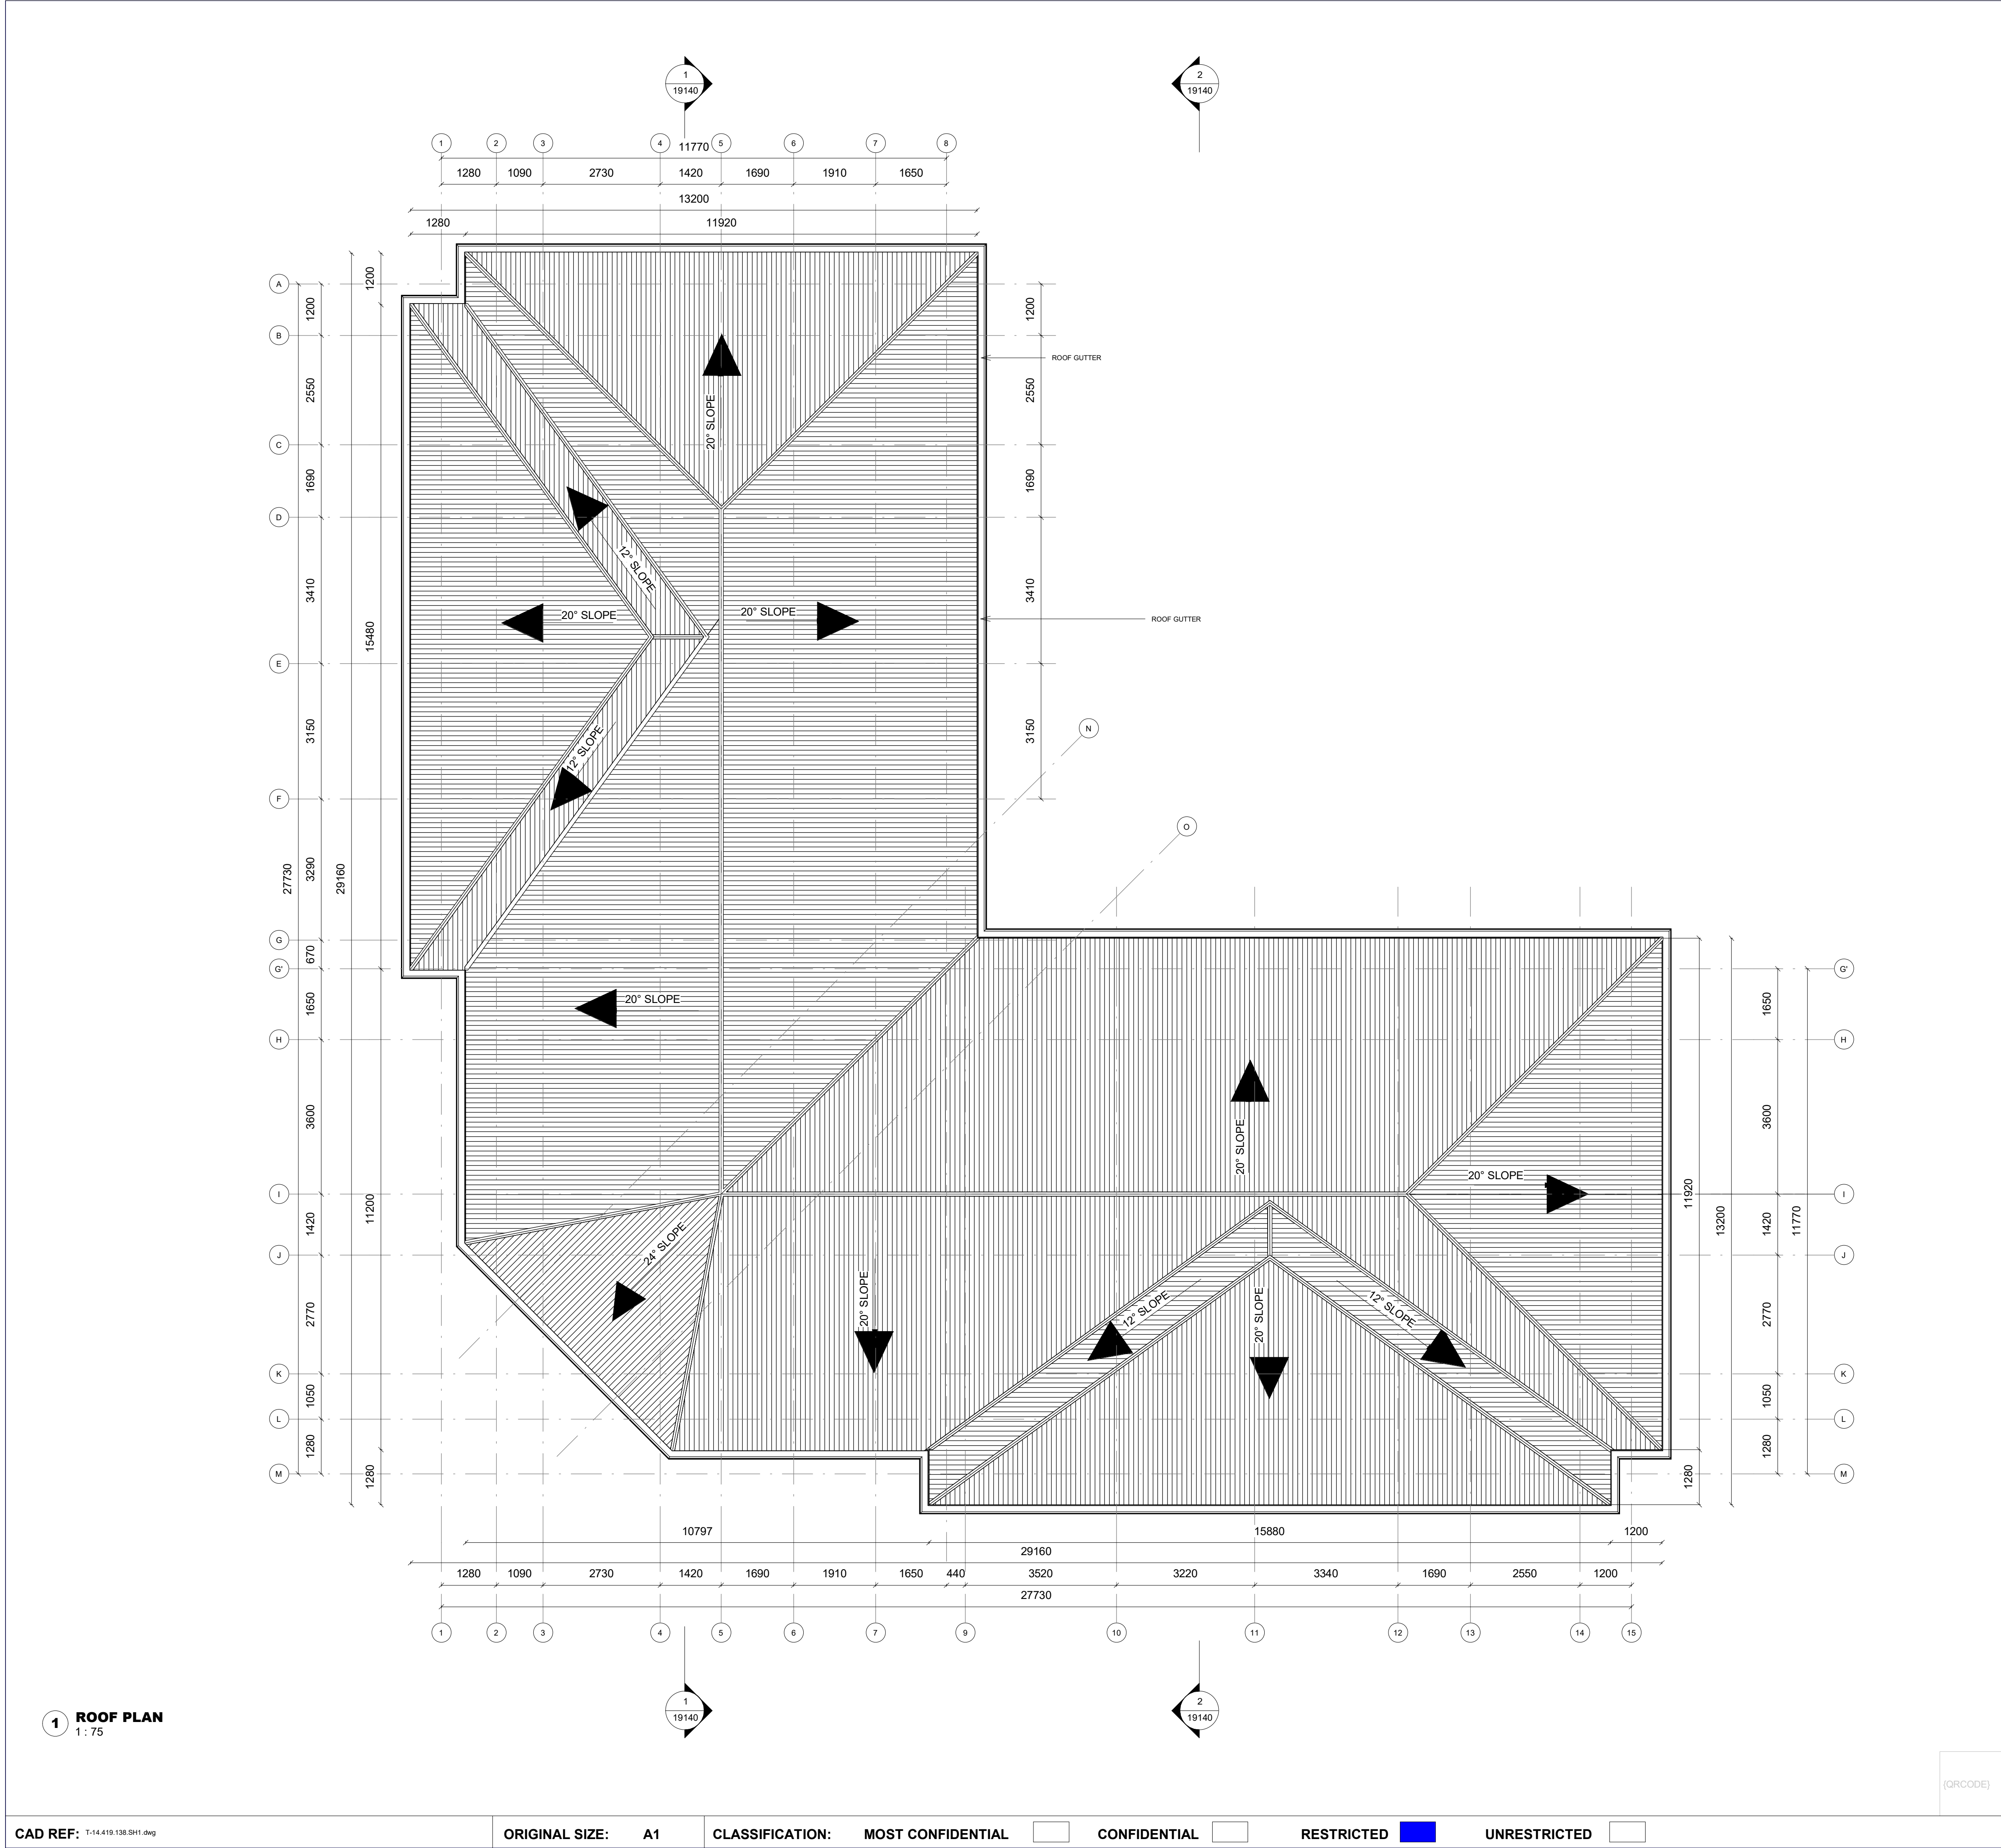

NOTES

- REFERENCE ELEVATION +99000.00 IS EQUAL TO SITE DATUM +2.6M MEAN SEA LEVEL
- ALL DIMENSIONS ARE IN MILLIMETERS AND ALL COORDINATES ARE IN METERS UNLESS OTHERWISE INDICATED
- ALL COORDINATES SHALL BE CONFIRMED ON SITE
- FIRE RATING OF STRUCTURAL ELEMENTS (COLUMNS AND BEAMS SHALL BE 1 HOURS . INTERIOR EXIT STAIRWAYS ENCLOSURE SHALL HAVE A FIRE RESISTANCE RATING OF NOT LESS THAN 1 HOUR
- ALL METALLIC PARTS AND BUILDING REINFORCEMENT OF COLUMNS AND WALLS SHALL BE PROVIDED WITH EARTH PLATE FOR EXTERNAL EARTH CONNECTION AS PER EARTHING AND LIGHTING TYPICAL INSTALLATION DRAWINGS(REF.DOC.T-14.143.101). EARTHING SHALL COMPLY WITH DEP33 64-10.33-GEN

REFERENCE DOCUMENTS

- T-14.111.427-SH1 - BUILDING GENERAL SPECIFICATION ASSET PERMANENT HOUSING
- T-14.419.138-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - FLOOR PLANS
- T-14.419.140-SH1 - PO 1394524 - ASSET PERMANENT HOUSING - TYPE A - SECTIONS
- T-14.162.089-SH1 - PLOT PLAN FOR ASSET PERMANENT HOUSING & OFF SITE - A12-WP7.4-000-GN-MC-300
- T-14.143.101-SH1 - TYPICAL EARTHING & LIGHTNING INSTALLATION DRAWINGS UNIT 4000 ELECTRICITY GENERATION SYSTEM

ABBREVIATION


LEGEND

- ALUMINIUM ROOFING SHEET
- ROOF RIDGE / VALLEY

SD-UJV

DOCUMENT STATUS	SIGNED	DATE
1 - ACCEPTED AS SUBMITTED (subject certified as final)		
2 - REVISE AND RESUBMIT		
3 - REJECTED - (Document unacceptable, revise and resubmit)		
4 - REVIEW NOT REQUIRED		
SCF - SUPPLIER CERTIFIED AS FINAL		
ISSUE OF CERTIFIED FINAL DOCUMENT DOES NOT RELIEVES SUPPLIER OF RESPONSIBILITY OR LIABILITY UNDER THE CONTRACT/PURCHASE ORDER		

KEY PLAN:

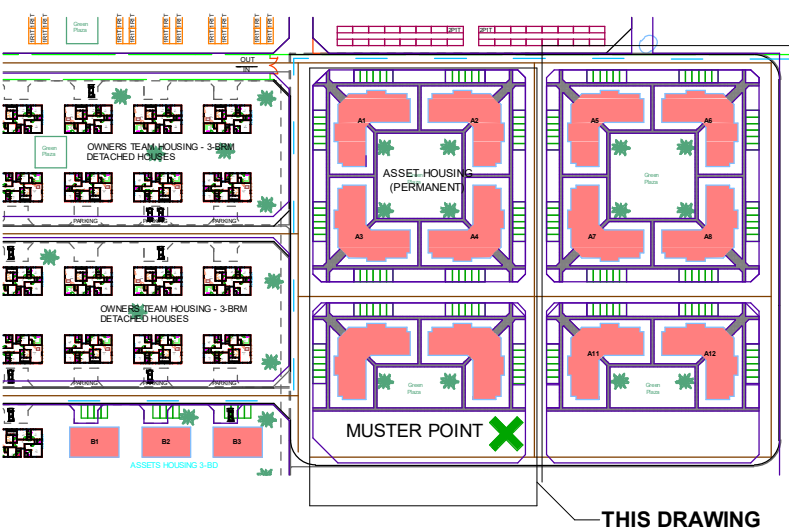

CWP NO: A12-WP7.4-000-BM-BA-102

0 1 2 3 4 5m
SCALE 1:75 (METERS)

REV	Revision	Description	DRW	DATE	CHKO	DATE	APPD	DATE
AC	CERTIFIED FINAL		OJ	20/08/24	YO	20/08/24	EZ	20/08/24
AB	CERTIFIED FINAL		OJ	10/10/23	YO	10/10/23	EZ	10/10/23
AA	CERTIFIED FINAL		OJ	21/07/23	YO	21/07/23	EZ	21/07/23
A	CERTIFIED FINAL		OJ	30/03/23	YO	30/03/23	EZ	30/03/23
OB	REISSUED FOR REVIEW		OJ	25/01/23	YO	25/01/23	EZ	25/01/23
OA	REISSUED FOR REVIEW		OJ	18/11/22	YO	18/11/22	EZ	18/11/22
O	ISSUED FOR REVIEW		OJ	30/08/22	YO	30/08/22	EZ	30/08/22

REVISIONS

This Document is confidential. The copyright there is vested in Nigeria LNG Ltd, Nigeria.
Recipient must obtain the written authority of the said company before wholly or partially duplicating.
All rights reserved.

PO No: PO 1394524

VENDOR DRAWING NO.
NLNG-1394524-ARC-DWG-005

DRAWN : OJ
DATE : 30/08/22

CHECKED : YO
DATE : 30/08/22

APPROVED : EZ
DATE : 30/08/22

APPD LNG :
DATE :

CONTRACTORS DRAWING NO.
L085-CC-B-19138

SCALE:
As indicated

NIGERIA LIQUEFIED NATURAL GAS
NLNG - BONNY

FIRST MARINE AND
ENGINEERING SERVICES LTD

DAEWOO E&C
NIGERIA LIMITED

LOCATION: **BONNY ISLAND, NIGERIA.** DISCIPLINE: **CIV** UNIT: **8500**

TITLE: **PO 1394524- ASSET PERMANENT HOUSING -**
TYPE A - FLOOR PLANS

COMPANY PROJECT NO. **818070NTP** CLIENT DOCUMENT NO: **T-14.419.138** SHEET: **04 OF 04** REV: **AC**

CONTRACTOR PROJECT NO. **NB8480**